

MOBILE TRANSPORTER MT

The mobile transporter is designed for transporting. The produce is transported upwards.



General description

The mobile transporter is designed to transport produce upwards efficiently. Its height can be adjusted manually to suit different requirements. Equipped with wheels, the machine is easy to move and reposition as needed. The conveyor belt is made of durable rubber with chevron-type cleats.

The frame can be made from painted mild steel or stainless steel AISI304. But the bearings and drive/idle rollers are always made from mild steel.

All dimensions in cm

MT 650 – 60	
A Length of the machine	650
B Width of the machine	60
C Outfeed height of the machine (in mm)	1575-2850

All capacities are indications based on experience from the past and depend on the agro climatic, soil and logistic conditions of the product, Allround VP does not guarantee any of these.

Characteristics

- ✓ Heavy duty, robust construction
- ✓ The outfeed height of the machine is between 1575 mm and 2850 mm
- ✓ The belt is made of rubber
- ✓ The type of cleats is chevron
- ✓ The height of the cleats is 10 mm
- ✓ The machine is on wheels to ensure flexibility

Options:

■ Material and treatment (frame)

Painted mild steel	Frame is made from painted mild steel. The bearings and drive/idle rollers are from mild steel
Stainless steel	Frame is made from stainless steel AISI304. The bearings and drive/idle rollers are from mild steel

■ Belt

Rubber	The belt is made of rubber
--------	----------------------------

■ Material and treatment (cleats)

Chevron	The type of cleats is chevron
---------	-------------------------------

■ Cleats height


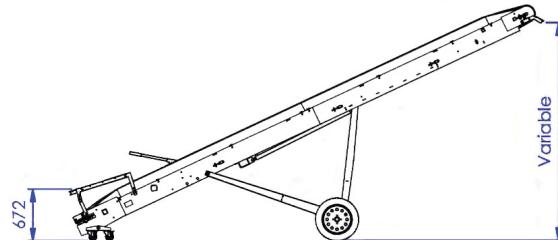

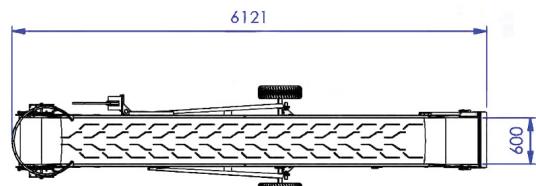
Cleats height	The height of the cleats is 10 mm
---------------	-----------------------------------

■ Electrical control

Stand-alone	Motors, necessary sensors and control panel. The length of the cable is 5, 10, 15 or 20 meter
-------------	---

■ Material and treatment (electrical panel)

Painted mild steel	The electrical panel is made from painted mild steel
--------------------	--

MT


For discussion only!

The dimensions are approximately.

We are free to resize and change the machines,
when we deem it necessary.

Tol principle: ISO 8015	General tolerances: ISO 20768	Fit system: ISO 286	Geometrical tolerancing: ISO 1101
	Project: Mobile transporter - -		
	Description: MT 600-60		
	Surface: - - -		
	Engineer: Intern Indic Scale: 1 : 65	00057548	Revision: 00
www.allround-p.nl	Date: 3/4/2020 Sheet size: A4	Unit: mm	Sheet: 1 of 1