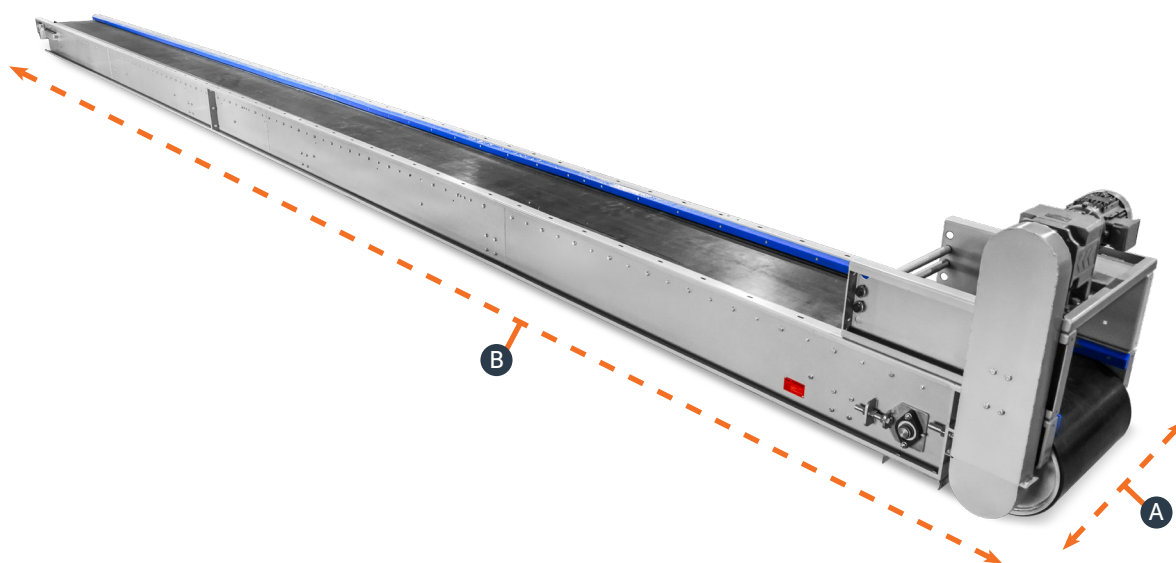


TRANSPORT CONVEYOR TO

The transport belt is designed for conveying. This type is mounted under a storage hopper to unload the product. On demand, the belt can be made of PVC and Rubber.



General description

The transport belt is designed for conveying. This type is mounted under a storage hopper to unload the product. On demand, the belt can be made of PVC and Rubber.

An extra motor can be included on demand to ensure the belt can move both ways. If this option is selected, the originally selected power (kW) must be divided between the two motors. On demand, a frequency inverter is included to control the speed.

All dimensions in cm

		TO 60	TO 80
A	Width of machine	60	80
B	Length of the machine	250 t/m 1000, steps of 25 cm	250 t/m 1000, steps of 25 cm

All capacities are indications based on experience from the past and depend on the agro climatic, soil and logistic conditions of the product, Allround VP does not guarantee any of these.

Characteristics

- ✓ Belt available in 250 – 1000 in steps of 25 cm
- ✓ An extra motor can be included on demand
- ✓ Available in various options like zinc plated steel, stainless steel, and painted mild steel
- ✓ On demand, a frequency inverter is included to control the speed

Options:

■ Material and treatment (frame)

Stainless steel	Frame is made from stainless steel. The bearings and drive/idle rollers are from mild steel
Painted mild steel	Frame is made from painted mild steel. The bearings and drive/idle rollers are from mild steel
Zinc plated steel	Frame is made from zinc plated steel. The bearings and drive/idle rollers are from mild steel

■ Belt

PVC	The belt is made of PVC
Rubber	The belt is made of rubber

■ Cleats size

17 x 11	The size of the cleats is 17 x 11 (W x H)
---------	---

■ Electrical control

No electric	Motors only. Wiring, additional sensors and/or control panel are not included
Stand-alone	Motors, necessary sensors, switch box and control box
Central control in line	Motors and necessary sensors

■ Frequency inverter

Speed adjustment	A frequency inverter is included to control the speed
------------------	---

■ Material and treatment (electrical panel)

Painted mild steel	The electrical panel is made from painted mild steel
Stainless steel	The electrical panel is made from stainless steel

Options:

■ Material and treatment (topside cover)

Zinc plated steel	A cover is mounted on the top of the machine, made from zinc plated steel
Stainless steel	A cover is mounted on top of the machine, made from stainless steel
Length of topside cover	0 t/m 1200, steps of 25 cm

■ Material and treatment (bottomside cover)

Zinc plated steel	A cover is mounted on the bottom of the machine, made from zinc plated steel
Stainless steel	A cover is mounted on bottom of the machine, made from stainless steel
Length of topside cover	0 t/m 1200, steps of 25 cm

■ Switch

Maintenance	A maintenance switch is included
Reverse	A reverse switch is included
Start/stop	A start/stop switch is included

■ Product sensor

Sensor	A product sensor is included
--------	------------------------------



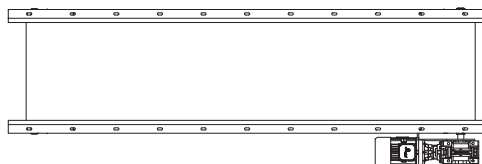
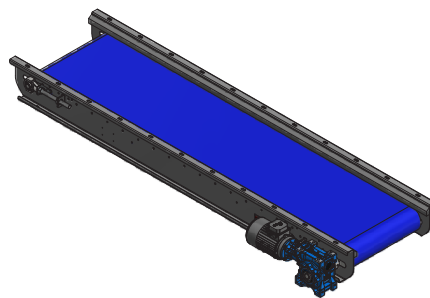
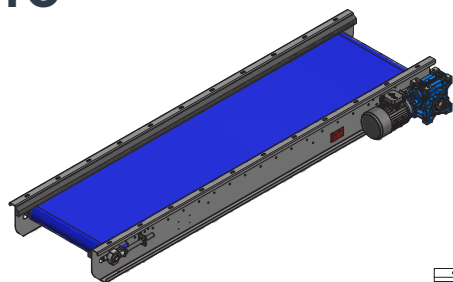
■ Bracket

Bracket	There is a bracket included.
---------	------------------------------



■ Extra motor

0.37 kW	An extra 0.37 kW motor is included to make sure the belt can move both ways. If this option is selected, the originally selected power (kW) must be divided between the two motors
0.75 kW	An extra 0.75 kW motor is included to make sure the belt can move both ways. If this option is selected, the originally selected power (kW) must be divided between the two motors
1.1 kW	An extra 1.1 kW motor is included to make sure the belt can move both ways. If this option is selected, the originally selected power (kW) must be divided between the two motors
1.5 kW	An extra 1.5 kW motor is included to make sure the belt can move both ways. If this option is selected, the originally selected power (kW) must be divided between the two motors
2.2 kW	An extra 2.2 kW motor is included to make sure the belt can move both ways. If this option is selected, the originally selected power (kW) must be divided between the two motors
3 kW	An extra 3 kW motor is included to make sure the belt can move both ways. If this option is selected, the originally selected power (kW) must be divided between the two motors

TO



For discussion only!
 The dimensions are approximately.
 We are free to resize and change the machines,
 when we deem it necessary.

Tol principle: ISO 8015	General tolerances: ISO 2078	Fit system: ISO 286	Geometrical tolerancing: ISO 1101
 Project: Transport belt Description: TO 275-60			
 Surface: _____ Engineer: S.loan Scale: 1 : 20 Date: 28-6-2019 Sheet size: A3 Unit: mm			
00011753			Revision: 01
Sheet: 1 of 2			